

LISTA DE APLICACIONES - BUYERS GUIDE

RB1430




8 424073 130488

Qty: 660

Weight: 8.532

O.E.M.	MAKE
144 0504	DAF
2611-12999747VT	MACK
5001 855 902	RENAULT TRUCKS
7485 137 789	RENAULT TRUCKS

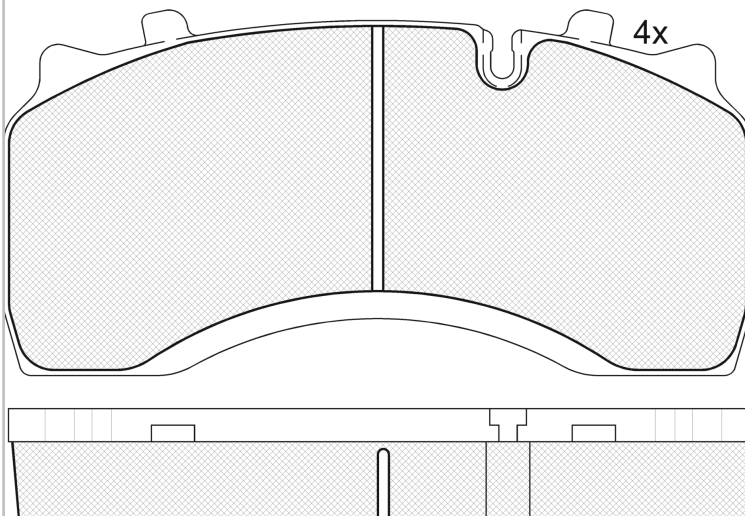

RB1430



90R-01178/749



Perrot-Wabco PAN 19-2

204.2x99.7x29.85

WVA
29119
29141
29142

FMSI
D1517-8726

Sin Filas



Trac.	CC	Kw	CV
-------	----	----	----



Front / Rear

DAF

LF 55 01.01-

FT 55.180 (CE 136 C)	Diesel		5880	136	185	01.01-	*	*
FT 55.220 (CE 162 C)	Diesel		5880	162	220	01.01-	*	*
FT 55.250 (CE 184 C)	Diesel		5880	184	250	01.01-	*	*

LF 55 01.01-

FA 55.170 (BE 123 C)	Diesel		3920	123	167	01.01-	*	*
FA 55.180 (CE 136 C)	Diesel		5880	136	185	01.01-	*	*
FA 55.180 (CE 136 C)	Diesel		5880	136	185	01.01-	*	*
FA 55.220 (CE 162 C)	Diesel		5880	162	220	01.01-	*	*
FA 55.220 (CE 162 C)	Diesel		5880	162	220	01.01-	*	*
FA 55.250 (CE 184 C)	Diesel		5880	184	250	01.01-	*	*

RENAULT TRUCKS

05.06-					Caja/Chasis				
220.12 (DXI 5)		Diesel		4764	158	220	05.06-	*	*
220.14 (DXI 5)		Diesel		4764	158	220	05.06-	*	*

Midlum 01.00-

250.16/CT (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
270.16/C (DCI 6A)	Diesel		6177	195	265	10.01-	*	*

Midlum 01.00-

210.12/C, 220.12/C (DCI 6W)	Diesel		6177	154	209	01.00-	*	*
210.12/C, 220.12/C (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
210.13/C, 220.13/C, 220.13/D (DCI 6W)	Diesel		6177	154	209	01.00-	*	*

LISTA DE APLICACIONES - BUYERS GUIDE

210.13/C, 220.13/C, 220.13/D (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
210.14/C, 220.14/C, 220.14/D (DCI 6W)	Diesel		6177	154	209	01.00-	*	*
210.14/C, 220.14/C, 220.14/D (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
210.15/C (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
210.16/C, 220.16/C, 22.16/D (DCI 6W)	Diesel		6177	154	209	01.00-	*	*
210.16/C, 220.16/C, 22.16/D (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
220.12 (DCI 6W)	Diesel		6177	158	215	10.01-	*	*
220.14 (DCI 6W)	Diesel		6177	158	215	10.01-	*	*
220.16 (DCI 6W)	Diesel		6177	158	215	10.01-	*	*
220.18/D (DCI 6W)	Diesel		6177	158	215	10.01-	*	*
250.12/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
250.13/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
250.14/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
250.15/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
250.16/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
270.12/C (DCI 6A)	Diesel		6177	195	265	10.01-	*	*
270.13/C, 270.13/D (DCI 6A)	Diesel		6177	195	265	10.01-	*	*
270.14/C, 270.14/D (DCI 6A)	Diesel		6177	195	265	10.01-	*	*
270.16/C, 270.16/D (DCI 6A)	Diesel		6177	195	265	10.01-	*	*
270.18/D (DCI 6A)	Diesel		6177	195	265	10.01-	*	*
Midlum 01.00-				Camión volquete				
210.12/C (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
210.13/C (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
210.15/C (MIDR 06.02.26 W/4)	Diesel		6177	154	209	01.00-	*	*
250.12/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
250.13/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
250.15/C (MIDR 06.02.26 Y/41)	Diesel		6177	184	250	01.00-	*	*
Midlum 01.00-				Veh. Municipal				
220.15 (DCI 6W)	Diesel		6177	158	215	10.01-	*	*